

StrapPack[®]

Automatic Strapping Machine



JK-5000

JK-5000



Automatic Strapping Machine

■ Fast!

At the rate of up to 37 straps/minute the JK5000 is 32 % faster than a comparable StraPack JK-5.

■ Economical


The JK5000 is priced so that customers with moderate strapping needs can afford a full featured quality arch machine.

■ Automatic Refeed

If a feed error occurs the refeed function automatically feeds the strap again and if successful initiates another cycle to automatically complete the strap.

■ Energy Saving

To conserve energy and reduce wear, the JK-5000 automatically shuts off the motor while maintaining proper heater temperature when it has not been cycled for 30 seconds. Depressing the Start Button re-starts the motor and applies the strap.

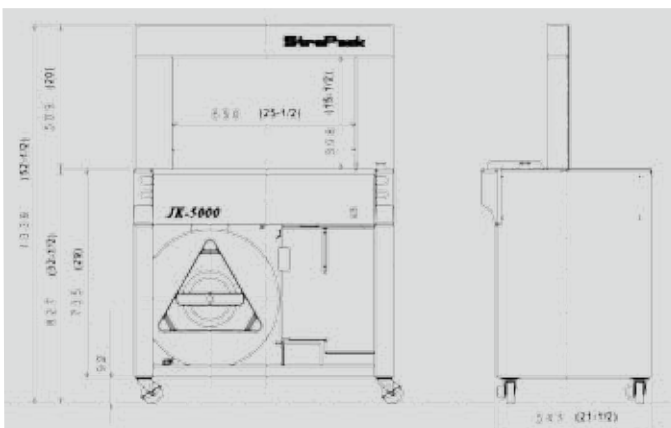

■ Standard Specifications

Dimension	Width	921 mm	36-1/4 in.
	Height	1336 mm	52-1/2 in.
	Depth	600 mm	23-5/8 in.
	Weight	115 kg.	255 lbs.
Table Height		827 mm	32-1/2 in.
Standard Arch Size		W 650 X H 400 mm	W 25 X H 16 in.
Min. Package Size		W 60 X H 30 mm	W 2-3/8 X H 1-1/8 in.
Joint / Strap/ Coil		heat seal / polypropylene ID 200 or 230 X W 200 mm	heat seal / polypropylene 8 X 8 or 9 X 8 in.
Strap Width		5, 6, 9, 12 (15.5) mm	1/4, 3/8, 1/2 (5/8) in.
Strap Tension		330 N (33 kgf) 75,150,300 mm stroke	17 lbsf. 3,6,12 in. stroke
Speed		1.6 sec. / strap 37 straps per min.	
Power Supply		100-120, 200-240 V 1 Phase 50 / 60 Hz 0.65 KVA	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2011 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

7-16-14, Ginza, Chuo-ku Tokyo 104-0061, JAPAN
Phone 81-3-6278-1805 Fax. 81-3-6278-1806
(URL) <http://www.strapack.com> (E-mail) info@strapack.com

STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090

STRAPACK, N.V./S.A.

Uilenbaan 200, 2160 Wommelgen, BELGIUM
Phone 32-3-355-1520 Fax. 32-3-355-1521