

StrapPack®

Semi-Automatic Strapping Machine



JK-2

JK-2



Innovative Semi-Automatic Strapping Machine

■ Automatic Feed Length

The JK-2 records the length of strap required and feeds exactly the same length automatically for every package. The operator resets the feed length memory and pulls the strap to the length needed. Exactly the same length of strap will be fed on the following cycles.

■ Adjustable Table Height

The table height can be easily adjusted from 30in (750mm) to 33 1/2 in (850mm) 3/4in (20mm) increments.

■ Capable of Soft Tension

The JK-2 has soft tension capability and can strap fragile packages without creating any damage.

■ Easy Strap Width Conversion

Changing the strap width is very easy. You can use from 1/4in to 1/2in (5mm to 12mm) polypropylene strap. No additional parts are required.

■ Sturdy Body yet Quiet Operation

The JK-2 is solid and durable, manufactured with quality materials, and it is amazingly quiet. The large tabletop provides ample workspace.

■ Easy Maintenance


The JK-2 has less moving parts than any other strapping machines of its kind, which can save operating cost and simplify the maintenance. In addition, Strapack has developed a new, unique maintenance mode on this machine. When engaged, the JK-2 steps through the strapping cycle one operation at a time. By observing the operation of the JK-2 in this special mode, it is easy to identify problems and make adjustments. Diagnosing problem has never been easier!

■ Advanced Sealing Unit Design

The sealing unit slide table design is borrowed from other highly successful Strapack automatic strapping machines. This design means easier maintenance and less wear than the heads on other semi-automatic strapping machines. Thanks to this new features a new heater design that provides longer life than our previous heaters.

■ Newly Designed Reel Brake

The Reel Brake Arm on the JK-2 uses a heavy-duty spring to control the strap coil. This innovative, elegant design provides soft start and stop of the strap coil, increasing the reliability of the JK-2 over other machines in its class. In addition, the parts subject to wear, brake belts and pads, are completely eliminated, another low maintenance feature of the JK-2.

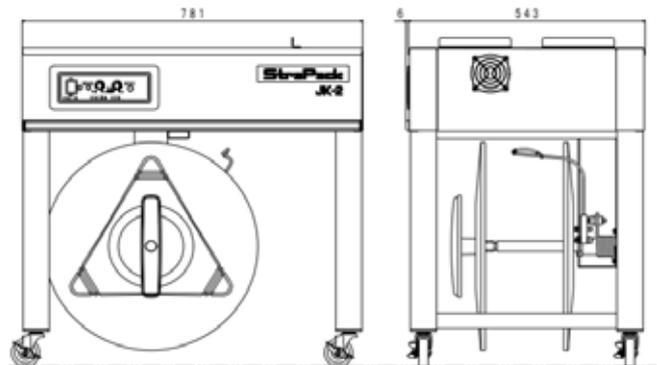

■ Standard Specifications

Dimension	Width	781 mm	30-3/4 in.
	Height	750 - 850mm	29-1/2 - 33-1/2 in.
	Depth	549 mm	21-5/8 in.
	Weight	60 kg.	132 lbs.
Table Height	750,775,800,825,850 mm		29-1/2,30-1/2,31-1/2,32-1/2,33-1/2 in.
Min. Package Size	W 90 X H 30 mm		W 3-1/2 X H 1-1/8 in.
Joint / Strap/ Coil	heat seal / polypropylene		heat seal / polypropylene
	ID 200 or 230 X W 200 mm		8 X 8 or 9 X 8 in.
Strap Width / Thickness	5, 6,9,12 (15.5) mm		1/4,3/8,1/2 (5/8) in.
Power Supply	100-120, 200-240 V 1 Phase 50 / 60 Hz 0.56 KVA		

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2010 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION
2-1-19, Hinode, Kawasaki-ku,
Kawasaki-shi, Kanagawa 210-0824,
Japan
Phone 81-(0)44-288-1180
Fax. 81-(0)44-288-1183
(URL) <http://www.strapack.com>
(E-Mail) info@strapack.com

STRAPACK INC.
33508 Central Avenue, Union City, CA 94587-2097 U.S.A
Phone 1-510-475-6000 Fax. 1-510-475-6090

STRAPACK. N.V./S.A.
Uilenbaan 200, B-2160 Wommelgem, Belgium
Phone 32-(0)3-355-1520 Fax. 32-(0)3-355-1521